

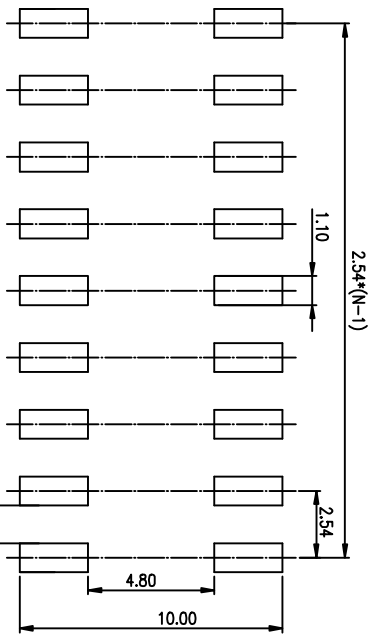


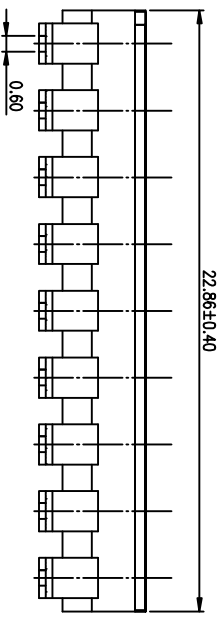



PRODUCT NO.	DISC09SUGET
RoHS compliant	

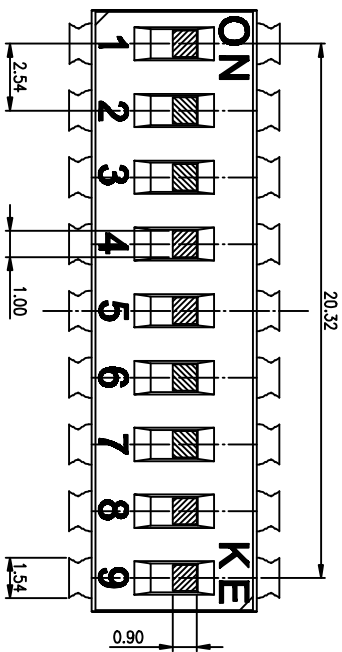

RECOMMENDED P.C.B. LAYOUT (TOP VIEW)

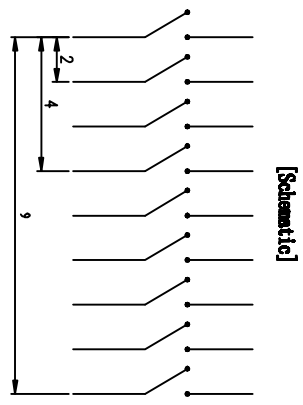

[Schematic]

- NOTES :
- 1> Specification:
- 1> Operating force: 1000gf Max
 - 2> Operating Temperature: -40° to +85°
 - 3> Storage Temperature: -40° to +85°
 - 4> Mechanical Life: 3000cycles minimum
 - 5> Electrical Life: 2000cycles 25mA 24VDC
2. PLATING:
- GOLD FLASH 1u"(min.) SOLDER TAIL,
 - 3u" GOLD PLATING ON THE CONTACT AREA,
 - WITH 50u" NICKEL UNDERPLATING OVERALL.

3. PART NUMBER DESCRIPTION

- DISC XX T S G E T
- [包裝方式: T-管裝 R=Roll]
 - [導體層: B-鍍鍍銀3u" G-鍍鍍銀3u" 內鍍鍍銀1.2u"]
 - [G-鍍鍍金 S=內鍍鍍金]
 - [腳型: S脚 / J脚 / 環脚 / A脚 / Z脚]
 - [T-低插裝 S-低插不插裝 L-長插]
 - [產品代號: 02-2P 04-4P 06-6P 08-8P 10-10P 12-12P]

Number	Part Name	Material	Finished
①	Actuator	UL94 V0	White
②	Cover	UL94 V0	Black
③	Movable	Copper Alloy	3u"Gold
④	Terminal	Brass	1u"Gold
⑤	Base	UL94 V0	Black
⑥	Terminal Contact	Brass	3u"Gold

TOLERANCE UNLESS OTHERWISE SPECIFIED	INSPECTION COPY
LINER	PROJECTION
0 ± 0.25	0. ± 2'
.00 ± 0.15	.0 ± 1'
.000 ± 0.10	.00 ± 0.5'
DESIGN	2012/04/12
DRAWING	
CHECK	
APPRO.	

東富精機電子股份有限公司 Dongfuchen Kingtek Industrial Co., Ltd.
TITLE
BY DISC SERIES PITCH 2.54mm
PRODUCT FAMILY DISC SERIES
PRAT NO. DISC09SUGET
FILE NO. DISC09SUGET-A
SIZE UNIT SCALE SHEET REV.
A4 mm 2 : 1 1 OF 1 A